


ESM-185 Luminous PV

**182mm Bifacial
Luminous Mono
Half Cell PV Module**

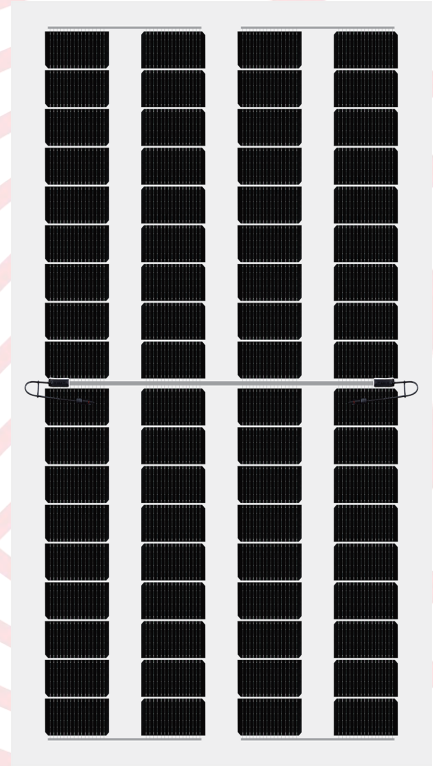

TRANSMITTANCE 40 (%)

Module characteristics



SMBB Technology
Half Cut Solar Cell



High Energy
Performance



100% Inspection
30years Guarantee



Fire Class A



Strengthened
Mechanical Load




Advanced Bifacial
Efficiency




Long and reliable quality assurance


IEC61215(2016), IEC61730(2016)
ISO9001:2015: Quality management system
ISO14001:2015: Environmental management system
ISO45001:2018: Occupational health and safety management system

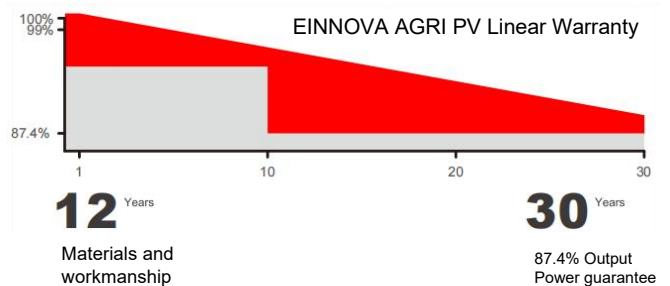

Mechanical Diagrams

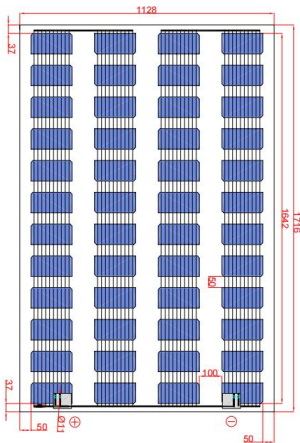

Curve

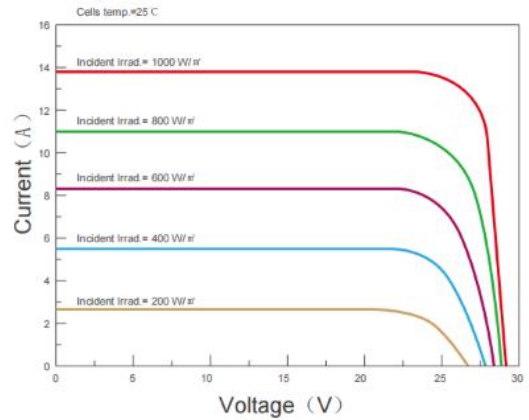

All Dimensions in mm
 The above drawing is a graphical representation of the product.
 For engineering quality drawings please contact EINNOVA.

Characteristics(STC)

Module Type	ESM-185
	STC
Maximum Power - Pmax(W)	185
Open Circuit Voltage - Voc(V)	33.55
Short-Circuit Current - Isc(A)	6.91
Voltage at Pmax - Vmp(V)	28.31
Current at Pmax - Imp(A)	6.57
Module Efficiency - ηm(%)	9.55
Power Tolerance(W)	(0, +4.99W)
Maximum System Voltage(V)	700Vdc (IEC/UL)
Maximum Series Fuse Rating (A)	25A

STC : Irradiance 1000W/m² , Cell Temperature 25°C, Air Mass 1.5

Mechanical Specifications

Dimensions	1722*1134*30mm
Weight	19kgs
Solar Cells	Mono crystalline 182mm (4x12pcs)
Front Glass	3.2mm
Frame	Aluminum Silver Frame
Junction Box	IP67
Output Cables	4.0mm ² , 100cm (+), 120cm (-), length can be customized
Connector	MC4 Compatible
Mechanical Load	Front Side Max. 5400Pa, Rear Side Max. 2400Pa

Temperature Characteristics

Pmax Temperature Coefficient	-0.290%/°C
Voc Temperature Coefficient	-0.250%/°C
Isc Temperature Coefficient	+0.045%/°C
Operating Temperature	-40 ~ +85°C
Nominal Operating Cell Temperature(NOCT)	45±2°C

EINNOVA SOLARLINE ENERGY CORP. LIMITED
 210000 Nanjing
 PEOPLE'S REPUBLIC OF CHINA
 TEL: +86-25-8479-2033
 Cell: +86-138-13088384
 EMAIL : emma.wu@einnova-solarline.com
 Website: www.einnova-solarline.com

Packing Configuration

Product size	1716*1128*30mm	
Container	20'GP	40'HQ
Pieces per Pallet	36	36
Pallets per Container	486	938